

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :
A61B 17/32

A1

(11) International Publication Number: WO 00/69349

(43) International Publication Date: 23 November 2000 (23.11.00)

(21) International Application Number: PCT/US00/13959

(22) International Filing Date: 18 May 2000 (18.05.00)

(30) Priority Data:

09/314,278	18 May 1999 (18.05.99)	US
09/440,263	15 November 1999 (15.11.99)	US
09/542,976	4 April 2000 (04.04.00)	US

(63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application
US
Filed on 09/314,278 (CON)
18 May 1999 (18.05.99)

(71) Applicant (for all designated States except US): VASCULAR INNOVATIONS, INC. [US/US]; 171 Jefferson Drive, Menlo Park, CA 94025 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): VARGAS, Jaime [US/US]; 879 Clara Drive, Palo Alto, CA 94303 (US). DONOHUE, Brendan, M. [US/US]; 145 Dore Street, San Francisco, CA 94103 (US). ANDERSON, Scott, C. [US/US]; 548 Cashmere Court, Sunnyvale, CA 94087 (US). BENDER, Theodore [US/US]; 2822 Emerson Street, Palo


Alto, CA 94306 (US). YENCHO, Stephen [US/US]; 320 Linfield Drive, Menlo Park, CA 94025 (US). HAUSEN, Bernard [US/US]; 1024 Mallet Court, Menlo Park, CA 94025 (US). HENDRICKSEN, Michael [US/US]; 612 Cambridge Avenue No. 4, Menlo Park, CA 94025 (US).

(74) Agent: PETERSON, James, W.; Burns, Doane, Swecker & Mathis, LLP, P.O. Box 1404, Alexandria, VA 22313-1404 (US).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: TISSUE PUNCH

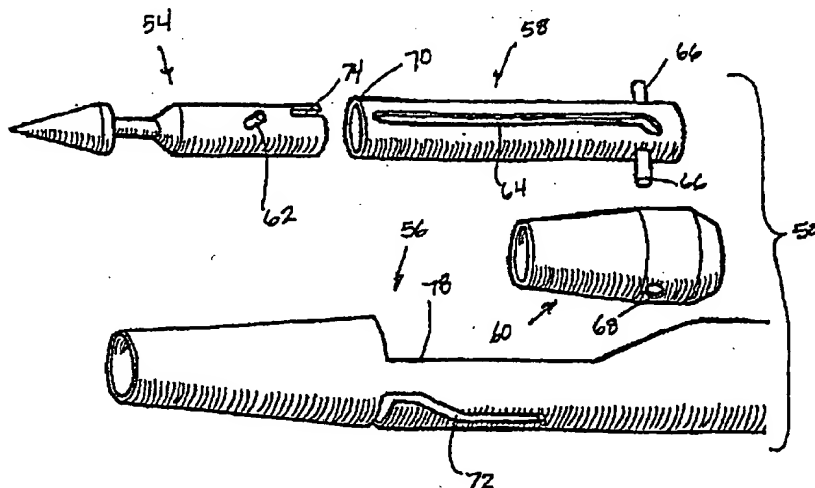

(57) Abstract

A tissue punch (50) for creating a hole in the wall of a target blood vessel for receiving an anastomosis device includes a piercing element (54) for penetrating the tissue and a cutting element for cutting a plug of tissue around the pierced hole. The tissue punch (50) includes a trocar (56) for inserting the piercing element (54). After punching is complete, the piercing element (54) is removed from the trocar (56) through a side wall (78) of the trocar (56) so that a medical device can be deployed through the trocar lumen. The tissue punch (50) may also include a tissue trap (58) for trapping the plug of tissue.

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TC	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TISSUE PUNCH

BACKGROUND OF THE INVENTION

Field of the Invention

The invention relates to a tissue punch, and more particularly, the invention
5 relates to a tissue punch for forming an opening in a target blood vessel for
deploying an anastomosis device to connect a graft vessel to the target blood
vessel.

Brief Description of the Related Art

Vascular anastomosis is a procedure by which two blood vessels within a
10 patient are surgically joined together. Vascular anastomosis is performed during
treatment of a variety of conditions including coronary artery disease, diseases of
the great and peripheral vessels, organ transplantation, and trauma. In coronary
artery disease (CAD) an occlusion or stenosis in a coronary artery interferes with
blood flow to the heart muscle. Treatment of CAD involves the grafting of a
15 vessel in the form of a prosthesis or harvested artery or vein to reroute blood flow
around the occlusion and restore adequate blood flow to the heart muscle. This
treatment is known as coronary artery bypass grafting (CABG).

In the conventional CABG, a large incision is made in the chest and the
sternum is sawed in half to allow access to the heart. In addition, a heart lung
20 machine is used to circulate the patients blood so that the heart can be stopped and
the anastomosis can be performed. During this procedure, the aorta is clamped
which can lead to trauma of the aortic tissue and/or dislodge plaque emboli, both
of which increase the likelihood of neurological complications. In order to
minimize the trauma to the patient induced by conventional CABG, less invasive
25 techniques have been developed in which the surgery is performed through small
incisions in the patients chest with the aid of visualizing scopes. Less invasive

-2-

CABG can be performed on a beating or stopped heart and thus may avoid the need for cardiopulmonary bypass.

In both conventional and less invasive CABG procedures, the surgeon has to suture one end of the graft vessel to the coronary artery and the other end of the graft vessel to a blood supplying vein or artery. The suturing process is a time consuming and difficult procedure requiring a high level of surgical skill. In order to perform the suturing of the graft to the coronary artery and the blood supplying artery the surgeon must have relatively unobstructed access to the anastomosis site within the patient. In the less invasive surgical approaches, some of the major coronary arteries including the ascending aorta cannot be easily reached by the surgeon because of their location. This makes suturing either difficult or impossible for some coronary artery sites. In addition, some target vessels, such as heavily calcified coronary vessels, vessels having very small diameter, and previously bypassed vessels may make the suturing process difficult or impossible.

Accordingly, it would be desirable to provide a sutureless vascular anastomosis device which easily connects a graft vessel to a target vessel and can be deployed in limited space.

Deployment of a sutureless anastomosis device, such as those described in U.S. Patent Application Serial No. 09/314,278, involves forming an opening in the target vessel and inserting the anastomosis device with a graft vessel attached into the opening. Accordingly, it would be desirable to provide a one piece tool which can perform both tissue punching and anastomosis device deployment. In order to provide a one piece device it would be desirable to provide a tissue punch which is advanced through a trocar and then is moved out of the trocar to allow deployment of the anastomosis device through the same trocar.

-3-

SUMMARY OF THE INVENTION

The present invention relates to a tissue punch for forming an opening in a target blood vessel for deploying an anastomosis device to connect a graft vessel to the target vessel.

5 In accordance with one aspect of the present invention, an apparatus for piercing a vessel, punching a hole in the vessel, removing punched tissue from the vessel, and introducing an object into the vessel through the punched hole is described. The apparatus includes a punch with a pointed piercing end for
10 piercing a vessel to allow introduction of the punch into the vessel, a tubular element arranged coaxially with the punch through which the punch retracts to remove vessel tissue, and an introducer located coaxially around the tubular element. The introducer includes an area into which the punch and tubular
15 element can be moved to allow introduction of an object into the punched hole in the vessel through the introducer.

15 In accordance with another aspect of the present invention, a tissue punch includes a piercing element, a cutting edge, and a trocar receiving the piercing element. The piercing element has a pointed distal end, a tissue receiving space, and an anvil adjacent the tissue receiving space. The cutting edge is arranged to
20 contact the anvil to cut a piece of tissue. The trocar has a side opening for removing the piercing element from the trocar after punching tissue.

In accordance with an additional aspect of the present invention, a method of punching a plug of tissue from the wall of a blood vessel includes the steps of
25 penetrating the wall of the blood vessel with a piercing element to form an opening in the blood vessel, punching a plug of tissue around the opening in the blood vessel, and inserting a trocar into the punched hole in the blood vessel.

In accordance with a further aspect of the invention, a double tissue punch includes a piercing element having a pointed distal end and a first anvil surface; a

-4-

first cutting element movable with respect to the piercing element, the first cutting element having a cutting edge arranged to contact the first anvil surface; and the first cutting element having a second anvil surface, a second cutting element movable with respect to the piercing element and the first cutting element, the second cutting element having a cutting edge arranged to contact the second anvil surface.

The present invention provides advantages of a tissue punch which is deployed through a trocar and is removed through a side wall of the trocar so that the trocar can subsequently be used for deployment of a medical device. The invention also provides the advantage of trapping a tissue plug which is cut by the tissue punch.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail with reference to the preferred embodiments illustrated in the accompanying drawings, in which like elements bear like reference numerals, and wherein:

FIG. 1 is a perspective view of a tissue punch according to the present invention in a tissue penetrating position;

FIG. 2 is a perspective view of the tissue punch of FIG. 1 with the piercing element withdrawn inside the trocar;

FIG. 3 is a perspective view of the tissue punch of FIG. 1 as the piercing element is pivoted out of the trocar;

FIG. 4 is a perspective view of the tissue punch of FIG. 1 with the piercing element pivoted further;

FIG. 5 is a perspective view of the tissue punch of FIG. 1 with the piercing element completely removed from the trocar;

FIG. 6 is an exploded perspective view of a tissue punch having a cam release system;

-5-

FIG. 7 is a perspective view of the tissue punch of FIG. 6 in an assembled, tissue penetrating position;

FIG. 8 is a partially cut away perspective view of the tissue punch of FIG. 6 in a tissue cutting position;

5 FIG. 9 is a perspective view of the tissue punch of FIG. 6 after tissue punching is completed;

FIG. 10 is a partially cut away view of FIG. 9;

FIG. 11 is a perspective view of the tissue punch of FIG. 6 with the piercing element and tissue trap partially removed from the trocar;

10 FIG. 12 is a perspective view of the tissue punch of FIG. 6 with the piercing element and tissue trap completely removed from the trocar;

FIG. 13 is an exploded perspective view of a tissue punch having a bendable tab release system;

15 FIG. 14 is a perspective view of the tissue punch of FIG. 13 in an assembled tissue penetrating position;

FIG. 15 is a partially cut away view of FIG. 14;

FIG. 16 is a partially cut away perspective view of the tissue punch of FIG. 13 after tissue cutting is completed;

20 FIG. 17 is a partially cut away perspective view of the tissue punch of FIG. 13 with the piercing element and tissue trap partially removed from the trocar;

FIG. 18 is a partially cut away perspective view of the tissue punch of FIG. 13 with the piercing element and tissue trap completely removed from the trocar;

FIG. 19 is an exploded perspective view of a tissue punch having a snap release system;

25 FIG. 20 is a perspective view of the tissue punch of FIG. 19 in an assembled tissue penetrating position;

FIG. 21 is a partially cut away view of FIG. 20;

-6-

FIG. 21A is an isolated perspective view of the piercing element and tissue trap of FIG. 21;

FIG. 22 is a partially cut away perspective view of the tissue punch of FIG. 19 after tissue punching is completed;

5 FIG. 23 is a partially cut away perspective view of the tissue punch of FIG. 19 with the piercing element and tissue trap partially removed from the trocar;

FIG. 23A is an isolated perspective view of the piercing element and tissue trap of FIG. 23;

10 FIG. 24 is a perspective view of the tissue punch of FIG. 19 with the piercing element and tissue trap completely removed from the trocar; and

FIGS 25-30 are schematic side views of a double tissue punch showing a series of steps in a punching sequence with the double tissue punch.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 The tissue punch according to the present invention is used to create a hole in a wall of a target blood vessel for receiving an anastomosis device to connect a graft vessel to the target vessel. The tissue punch includes a piercing element for penetrating the target vessel wall, a cutter for cutting a plug of tissue, and a trocar which is inserted in the opening in the wall after punching has been completed. After punching is complete, the piercing element is removed from the trocar and
20 the anastomosis device is then deployed through the open lumen of the trocar.

The tissue punch according to the present invention is particularly useful for use in coronary artery bypass grafting (CABG) in which a graft vessel is connected at opposite ends to the aorta and to a coronary artery. However, the target vessel which is punched with the tissue punch can be any vessel including
25 but not limited to the aorta, coronary artery, and arteries leading to the arms or head. The graft vessel for connection to the target vessel can be an arterial graft, a venous graft, or a synthetic prosthesis, as required. The anastomosis procedure is

-7-

preferably performed with minimally invasive procedures, without the stoppage of blood flow in the target vessel, and without the use of cardiopulmonary bypass. However, the anastomosis procedure may also be performed as a stopped heart and/or open chest procedure.

5 Preferably, the tissue punches according to the present invention are incorporated in a one piece tool which performs tissue punching and deployment of the anastomosis device. This one piece tool may be operated manually, such as by cams, or automatically, such as pneumatically.

10 FIG. 1 is a perspective view of a tissue punch 10 according to the invention which includes a one-piece piercing element 14 positioned within an introducer sheath or trocar 16. The piercing element 14 can be advanced and retracted in the trocar 16 by an elongated member 18 such as a spring steel strap or cable which extends through an opening 20 in a side of the trocar. The piercing element 14 includes a pointed distal tip 22 for penetrating the target vessel wall and a narrow shaft portion 28 around which the tissue of the target vessel wall contracts after
15 piercing. The distal tip 12 may be formed, for example, as a conical surface or by a plurality of ground surfaces extending to a point at the distal tip. An anvil surface 24 is located on the piercing element 14 between the distal tip 22 and the shaft 28. The anvil surface 24 acts with a cutting edge 26 of the trocar 16 to cut
20 an annular plug of tissue.

 In operation, the piercing element 14 is forcibly advanced to puncture the target vessel wall. After piercing, the tissue of the target vessel wall rests around the shaft portion 28 of the piercing element 14. The piercing element 14 is then pulled back inside the trocar 16 by the elongated member 18 to cut an annular plug
25 of tissue by compressing the tissue between the anvil surface 24 of the piercing element and the cutting edge 26 of the trocar 16. The cut plug of tissue can be trapped in an annular space surrounding the shaft 28 and removed from the surgical site on the piercing element 14.

-8-

By using the tissue punch 10 to cut a plug of the target vessel wall tissue in this manner, there is less tendency for tearing. In particular, the punched opening in the vessel wall is less apt to tear than an incision or puncture. A puncture opening is particularly apt to tear when an anastomosis device is inserted into the opening or when the opening is expanded by expansion of the anastomosis device.

FIGS. 1-5 illustrate the steps of punching and then removing the piercing element 14 from the side opening of the trocar 16 to allow the anastomosis device to be deployed through the lumen of the trocar. In FIG. 1, the piercing element 14 is in an extended piercing position. In this position, the tissue punch is advanced into the target vessel wall. The tissue punch 10 is preferably advanced by spring actuated motion provided by a tool on which the tissue punch is mounted. Alternatively, the tissue punch may be advance manually.

As shown in FIG. 2, the piercing element 14 is withdrawn into the trocar 16 by pulling on the elongated member 18 (shown in FIG. 1). Once the distal tip 22 of the piercing element 14 clears the distal end of the opening 20, the piercing element is pivoted as it is retracted out of the opening 20 in the side of the trocar 16 as shown in FIGS. 3-5.

As shown in FIG. 1, the piercing element 14 includes two side pins 30 connected to the elongated member 18. The piercing element 14 is retracted by pulling on the elongated member 18 or other arrangement to accomplish punching of the tissue in the manner described above. During such retraction, a pin 34 on the underside of the piercing element 14 travels in a slot 36 in the trocar 16 until it reaches a stop 38 at the proximal end of the slot. When the pin 34 hits the stop 38, the piercing element 14 is caused to pivot about the stop as shown in FIG. 3.

Further retraction of the piercing element 14, as shown in FIG. 4, causes an inclined proximal surface 40 of the piercing element to contact an edge 42 of the trocar opening 20 such that the piercing element rotates out of the opening 20. As shown in FIG. 5, the piercing element continues to rotate to a storage position

-9-

outside the trocar 16. When the piercing element is in the storage position, the inside of the trocar 16 can be used to maintain the opening in the blood vessel and for delivery of an anastomosis device to the incision in the target vessel.

FIG. 6-24 illustrate alternative embodiments of tissue punches including tissue traps for trapping and retaining the plug of tissue which is cut by the tissue punch. The trapping of tissue plug prevents possible complications which could occur if the plug of tissue is released in the surgical site.

FIG. 6 illustrates a tissue punch 50 which includes a piercing element 54, a trocar 56, a tissue trap 58, and a collar 60. The tissue punch 50 is assembled as illustrated in FIG. 7 with the piercing element 54 positioned within the tubular tissue trap 58 with a pin 62 of the piercing element extending out through a slot 64 of the tissue trap. The tissue trap 58 includes two side pins 66 which extend through corresponding openings 68 in the collar 60. The side pins 66 also extend into cam slots 72 in the trocar 56. The piercing element 14 also includes a slot 74 at a proximal end which receives an elongated member 76 shown in FIG. 7. The elongated member 76 is preferably a spring steel strap which is used as a pull wire to pull the piercing element 54 into the tissue trap 58 and as a spring to move the piercing element and tissue trap out of the opening 78 in the side wall of the trocar 56.

The punching procedure using the tissue punch 50 of FIGS. 6-12 will be described with respect to the sequence of steps shown in FIGS. 7-12. In the assembled position illustrated in FIG. 7, the piercing element 54 pierces the tissue of the blood vessel wall by automatic or manual advancement of the tissue punch. As shown in FIG. 8, after piercing the piercing element 54 is withdrawn inside the tissue trap 58 by pulling on the elongated member 76 to cut a plug of tissue with a cutting edge 70 of the tissue trap 58.

As shown in FIGS. 9 and 10, as the piercing element 54 is withdrawn, the pin 62 slides along the slot 64. When the pin 62 contacts the curved proximal end

-10-

of the slot 64 the piercing element is prevented from rotating by the spring strap element 76 and the tissue trap is caused to rotate. When the tissue trap 58 rotates the side pins 66 rotate in the cam slot 72 unlocking the tissue trap and piercing element 54 from the trocar 56. As the tissue trap 56 is further withdrawn, as shown in FIG. 11, the tissue trap slides back into the opening 78 in the trocar 56. Finally, as shown in FIG. 12, the spring bias of the elongated spring member 76 causes the tissue trap 58 and piercing element 54 to be moved out of the trocar 56 to allow the lumen of the trocar to be used for deployment of a medical device, such as an anastomosis device.

The collar 60 of the tissue punch 50 is used as a spacer to hold the tissue trap 56 at a center of the trocar lumen. It should be understood that the collar 60 may be formed as a part of the tissue trap 58 or as a separate element.

FIGS. 13-18 illustrate an alternative embodiment of a tissue punch 80 having a bendable tab release system. As shown in the exploded view of FIG. 13, the tissue punch 80 includes a piercing element 84, a trocar 86, and a tissue trap 88. As in the embodiment of FIGS. 6-12, the piercing element 84 includes a proximal slot 90 for receiving an elongated member 94 which acts as a pull wire and spring. The tissue trap 88 includes a plurality of tabs 94 which are cut and folded out from the tube of the tissue trap. The trocar 86 includes a plurality of openings 96 for receiving the plurality of tabs 94. The plurality of openings 96 are also provided with slots 102 which extend to a distal end of the trocar 56.

As shown in FIG. 14, the tissue punch 80, in an assembled configuration prior to punching, axially has the tabs 94 positioned within the openings 96 to lock the tissue trap 88 in position axially with respect to the trocar 86. The tissue trap 88 is locked in place to allow cutting of the tissue with the cutting edge 98 of the tissue trap.

The steps of operating the tissue punch 80 according to FIGS. 13-18 are illustrated in the sequence of steps shown in FIGS. 14-18. In FIGS. 14 and 15 the

-11-

tissue punch is shown assembled for punching. The tissue punch is advanced into the tissue of a target vessel wall automatically or manually. Once the target vessel wall has been penetrated, the piercing element 84 is withdrawn by pulling on the elongated member 92 to cut a plug of tissue with the cutting edge 98. FIG. 16 illustrates the position of the piercing element 84 after punching is complete.

As shown in FIG. 17, the piercing element 84 continues to be withdrawn until it abuts a stop member 100 inside the tissue trap 88. Continued withdrawal of the piercing element 84 pulls both the piercing element and the tissue trap 88 proximally and causes the tabs 94 to fold over allowing the tissue trap to be released from the trocar 86. As shown in FIG. 18, when the tissue trap 88 is released from the trocar 86, the spring force of the elongated member 92 moves the tissue trap and piercing element 84 out of the trocar.

FIGS. 19-24 illustrate a further embodiment of a tissue punch 110 having a snap release system. The tissue punch 110 includes a piercing element 114, a trocar 116, a tissue trap 118, and a collar 120. The collar 120 includes two legs 122 having tabs 124 at the ends. The collar 120 is fixed to the tissue trap 118. The tissue trap 118 has a cutting edge 126 and two slots 128 for accommodating the legs 122 and tabs 124 of the collar 120. The piercing element 114 has a tapered distal tip 130, a narrow shaft portion 132, and a larger shaft portion 134. In the assembled tissue penetrating position shown in FIGS. 20, 21, and 21A the tabs 124 are positioned adjacent the larger portion 134 of the shaft. The tabs 124 extend outward through openings 136 in the trocar 116 and lock the collar 120 and tissue trap 118 in position with respect to the trocar 116.

After punching, the piercing element 114, tissue trap 118, and collar 120 are removed as follows. As the piercing element 114 is withdrawn by the elongated member 138 as shown in 22, 23, and 23A, the tabs 124 of the collar 120 are positioned adjacent the narrow portion of the shaft 132. This allows the tabs 124 to flex inward releasing the tabs from the openings 136 in the trocar 116.

-12-

Once the collar 120 is released from the trocar 116, the piercing element 114, the tissue trap 118 and the collar 120 move out of the trocar 116 by the spring action of the elongated member 138 and allow the trocar to be used for insertion of a medical device.

5 FIGS. 25-30 illustrate a sequence of tissue punching with a double punch system for forming an opening in the wall of a blood vessel. The double punch system 150 is used to make openings larger than those made by a single punch embodiment. For openings larger than about 3 mm a double punch is preferred since a piercing element with a largest diameter of greater than about 3 mm tends
10 to cause excessive trauma to the tissue.

As shown in FIG. 25, the double punch system 150 includes a piercing element 154 having a first anvil 156, a spreading element 158 having a second anvil 160 and a first cutter 162, and a sleeve 164 having a second cutter 166. As shown in the sequence of FIGS. 26-30, the piercing element 154 is first inserted
15 through the tissue 170 of a blood vessel wall until the tissue rests around a shaft 172 of the piercing element. The spreading element 158 is then moved downwards as shown in FIG. 27 to cut a first plug of tissue 174 with the first cutter 162. The first plug 174 is contained within an interior of the spreading element 158 which forms a tissue trap.

20 As shown in FIG. 28 the spreading element 158 is then advanced through the tissue 170 until the tissue rests around a shaft 178 of the spreading element. The sleeve 164 is then advanced, as shown in FIG. 29, to cut a second plug of tissue 180 with the second cutter 166. The second plug of tissue 180 is contained within the sleeve 164 which forms a tissue trap.

25 FIG. 30 illustrates the withdrawal of the double punch system 150 containing the two annular plugs 174, 180 of tissue and leaving a tissue opening 184.

-13-

It should be understood that the double punch system is illustrated as a system for forming holes which are larger than an approximately 3 mm hole which can be easily formed with a single punch system. The double punch system can form holes of up to about 8 mm in diameter without causing tissue trauma. In order to make holes of larger diameters additional spreading elements and cutting elements can be used to form a triple punch system or other multiple punch system.

While the invention has been described in detail with reference to the preferred embodiments thereof, it will be apparent to one skilled in the art that various changes and modifications can be made and equivalents employed, without departing from the present invention.

-14-

WHAT IS CLAIMED IS:

1. An apparatus for piercing a vessel, punching a hole in the vessel, removing punched tissue from the vessel, and introducing an object into the vessel through the punched hole, the apparatus comprising:

5 a punch with a pointed piercing end for piercing a vessel to allow introduction of the punch into the vessel;

a tubular element arranged coaxially with the punch through which the punch retracts to remove vessel tissue; and

10 an introducer located coaxially around the tubular element, the introducer including an area into which the punch and tubular element can be moved to allow introduction of an object into the punched hole in the vessel through the introducer.

15 2. The apparatus of Claim 1, wherein the piercing end includes a shaft and a tissue receiving space formed as an annular space surrounding the shaft of the piercing element.

3. The apparatus of Claim 1, further comprising a cutting edge formed on the tubular element.

4. The apparatus of Claim 3, further comprising a tissue trap for containing a plug of tissue which is cut by the cutting edge.

20 5. The apparatus of Claim 4, wherein the tissue trap is a tubular member which is movable over the punch.

-15-

6. The apparatus of Claim 5, wherein the tissue trap has the cutting edge at a distal end.

7. The apparatus of Claim 6, further comprising means for locking a position of the tissue trap with respect to the introducer during cutting and for releasing the tissue trap after cutting.

8. A tissue punch comprising:
a piercing element having a pointed distal end, a tissue receiving space, and an anvil adjacent the tissue receiving space;
a cutting edge arranged to contact the anvil to cut a plug of tissue;
10 and
a trocar receiving the piercing element, the trocar having a side opening for removing the piercing element from the trocar after punching the tissue.

9. The tissue punch of Claim 8, wherein the piercing element includes a shaft and the tissue receiving space is an annular space surrounding the shaft of the piercing element.

10. The tissue punch of Claim 8 wherein the cutting edge is formed on the trocar.

11. The tissue punch of Claim 8, further comprising a tissue trap for containing a plug of tissue which is cut by the cutting edge.

12. The tissue punch of Claim 11, wherein the tissue trap is a tubular member which is movable over the piercing element.

-16-

13. The tissue punch of Claim 12, wherein the tissue trap has the cutting edge at a distal end.

14. The tissue punch of Claim 13, further comprising means for locking a position of the tissue trap with respect to the trocar during cutting and for releasing the tissue trap after cutting.

15. The tissue punch of Claim 14, wherein the means for locking and releasing the tissue trap is a cam element.

16. The tissue punch of Claim 14, wherein the means for locking and releasing the tissue trap is a bendable tab release system.

17. The tissue punch of Claim 14, wherein the means for locking and releasing the tissue trap is a snap release system.

18. A method of punching a plug of tissue from the wall of a blood vessel, the method comprising:

penetrating the wall of the blood vessel with a piercing element to form an opening in the blood vessel;

punching a plug of tissue around the opening in the blood vessel; and inserting a trocar into the punched hole in the blood vessel.

19. The method of Claim 18, wherein the piercing element is positioned in the trocar for penetrating the wall and is removed through an opening in a sidewall of the trocar after the punching step.

-17-

20. The method of Claim 18, further comprising a step of trapping the plug of punched tissue in a trap which is removed from the trocar with the piercing element.

21. The method of Claim 18, further comprising a step of punching a second plug of tissue around the punched hole in the blood vessel.

22. A double tissue punch comprising:
a piercing element having a pointed distal end and a first anvil surface;
a first cutting element movable with respect to the piercing element,
the first cutting element having a cutting edge arranged to contact the first anvil surface, and the first cutting element having a second anvil surface; and
a second cutting element movable with respect to the piercing element and the first cutting element, the second cutting element having a cutting edge arranged to contact the second anvil surface.

23. The double tissue punch of Claim 22, wherein the first cutting element cuts a first substantially circular plug of tissue and the second cutting element cuts a second substantially circular plug of tissue with a greater diameter than the first plug.

24. A method for removing a plug of tissue from the wall of a vessel, the method comprising:
piercing the wall of the vessel with a piercing element to allow introduction of a punch;
Introducing the punch;

-18-

retracting the punch into a tubular element which is coaxially located within an introducer to remove a plug of tissue from the vessel wall; and moving the piercing element, the punch, and the tubular element to allow introduction of an object into the vessel through the introducer.

5 25. The method of Claim 24, wherein the step of moving the piercing element, the punch, and the tubular element to allow introduction of the object into the vessel through the introducer involves removing the piercing element, the punch, and the tubular element through a side wall of the introducer.

10 26. The method of Claim 24, further comprising a step of retracting the punch and the tubular element into a second tubular element to remove a second plug of tissue from the vessel wall.

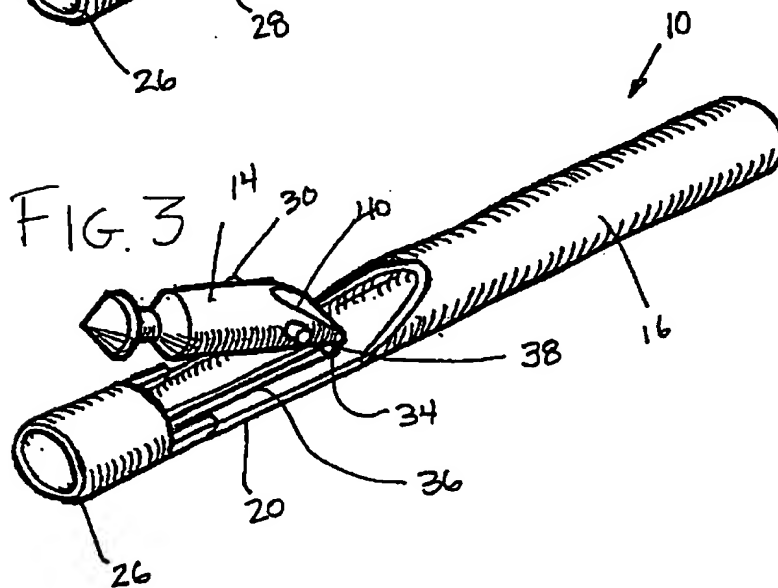
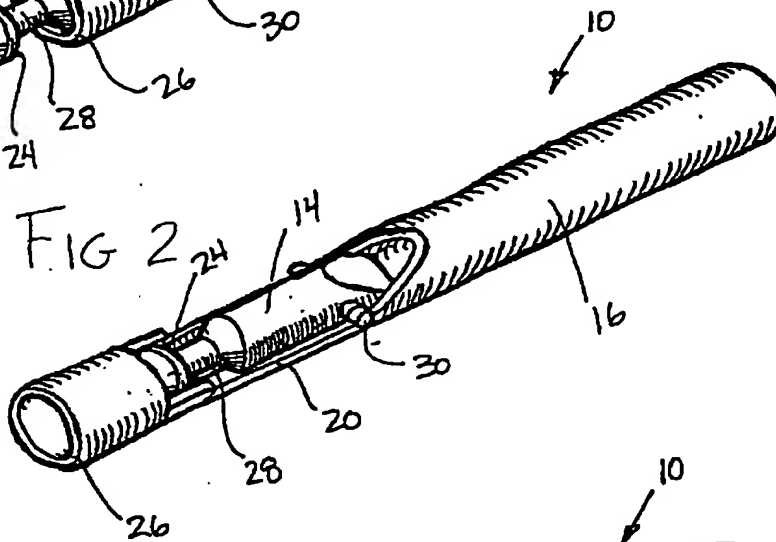
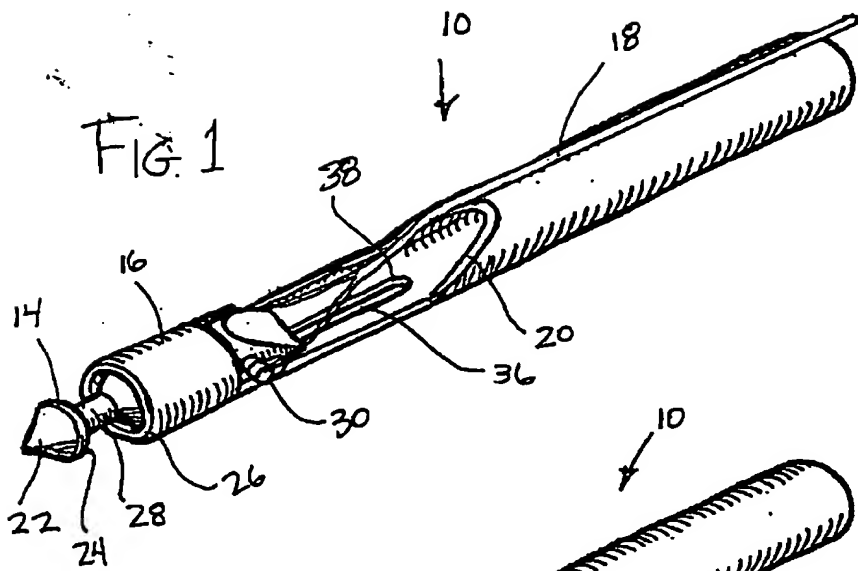


FIG. 4

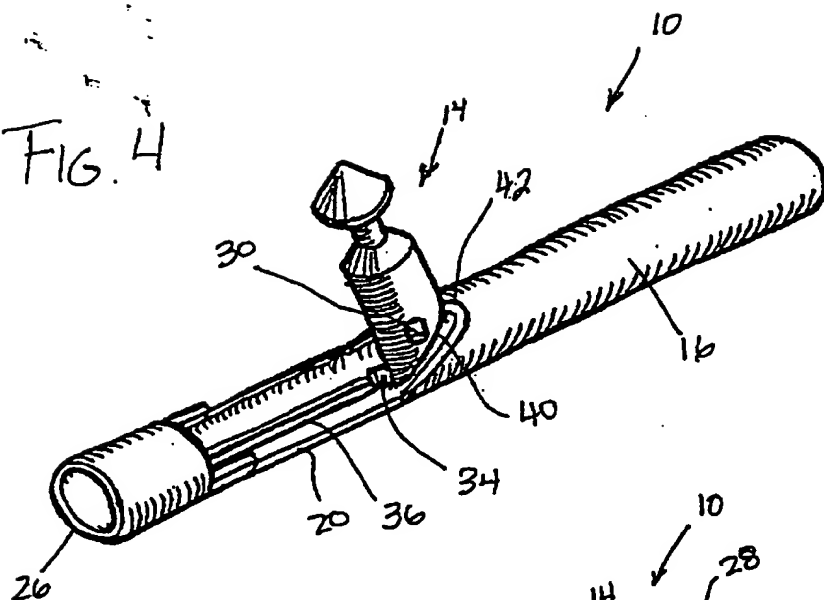


FIG. 5

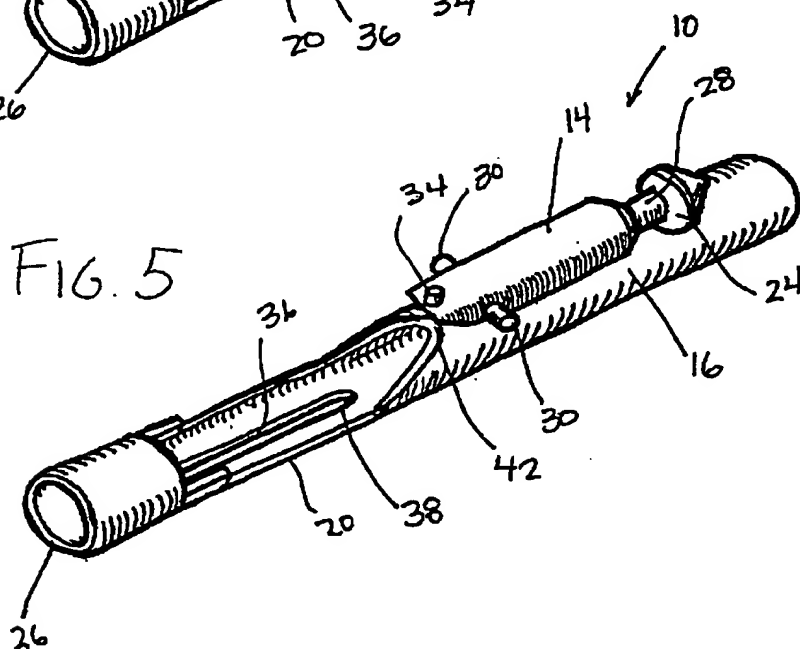


FIG. 6

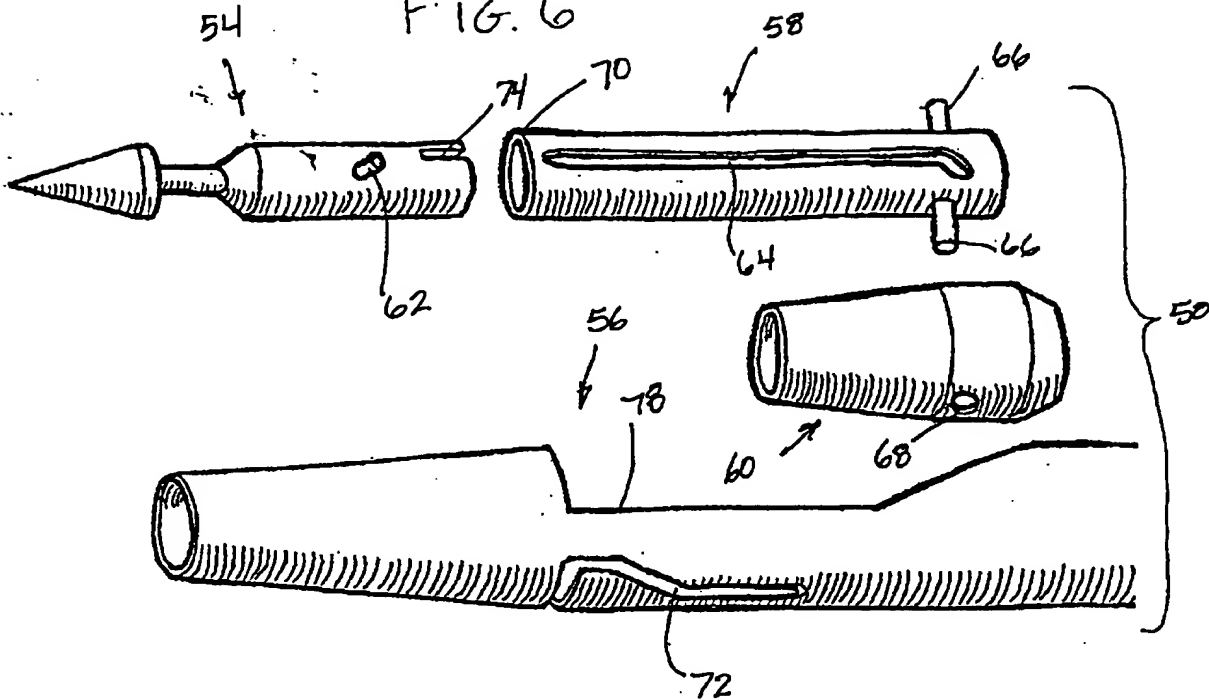


FIG. 7

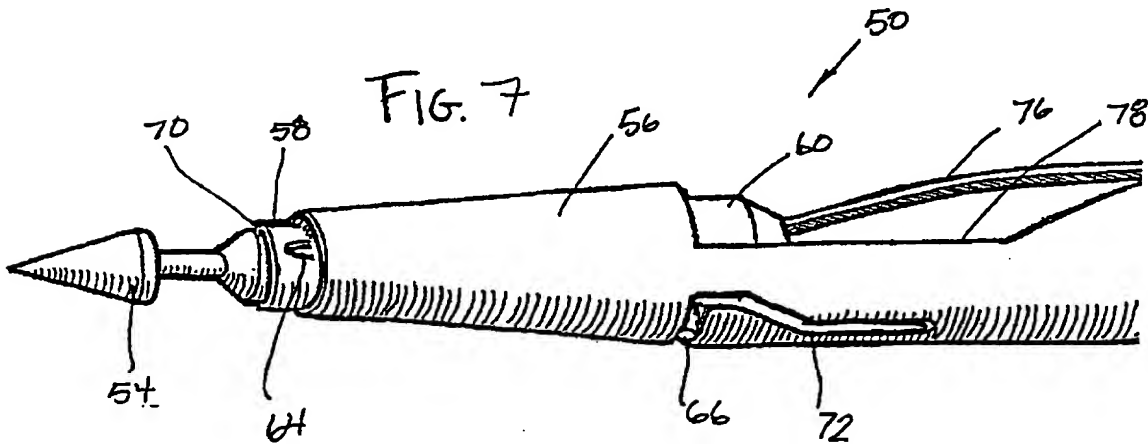


FIG. 8

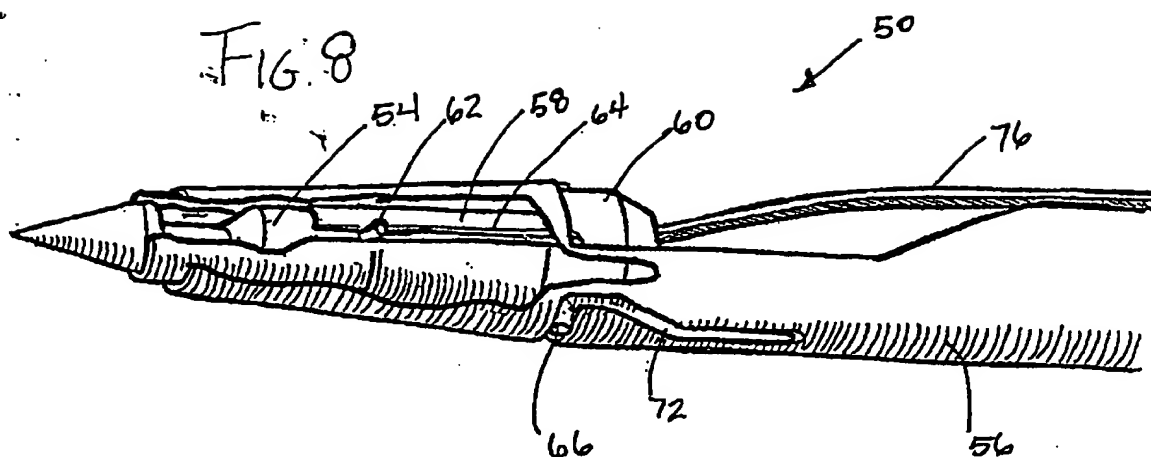


FIG. 9




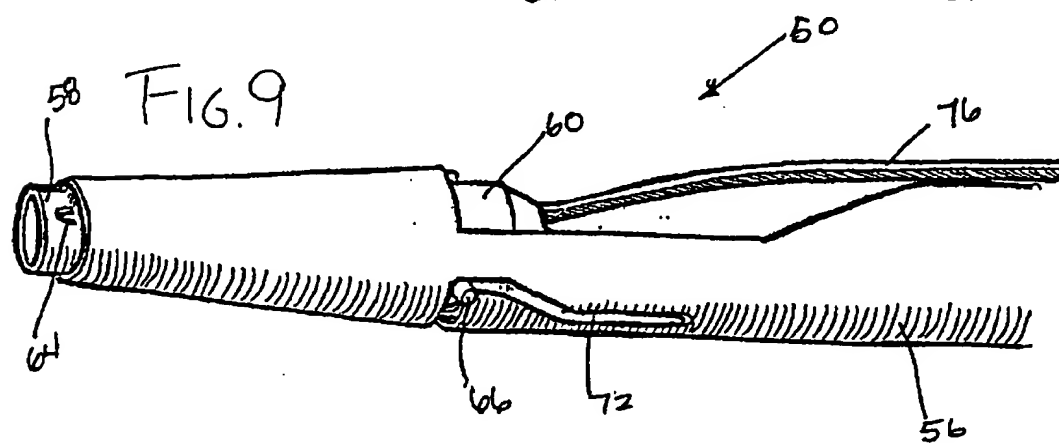





FIG. 10

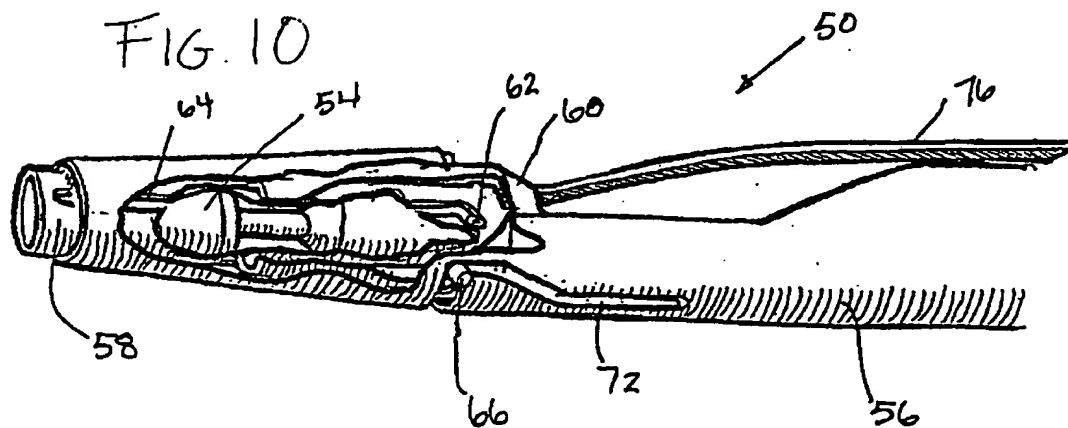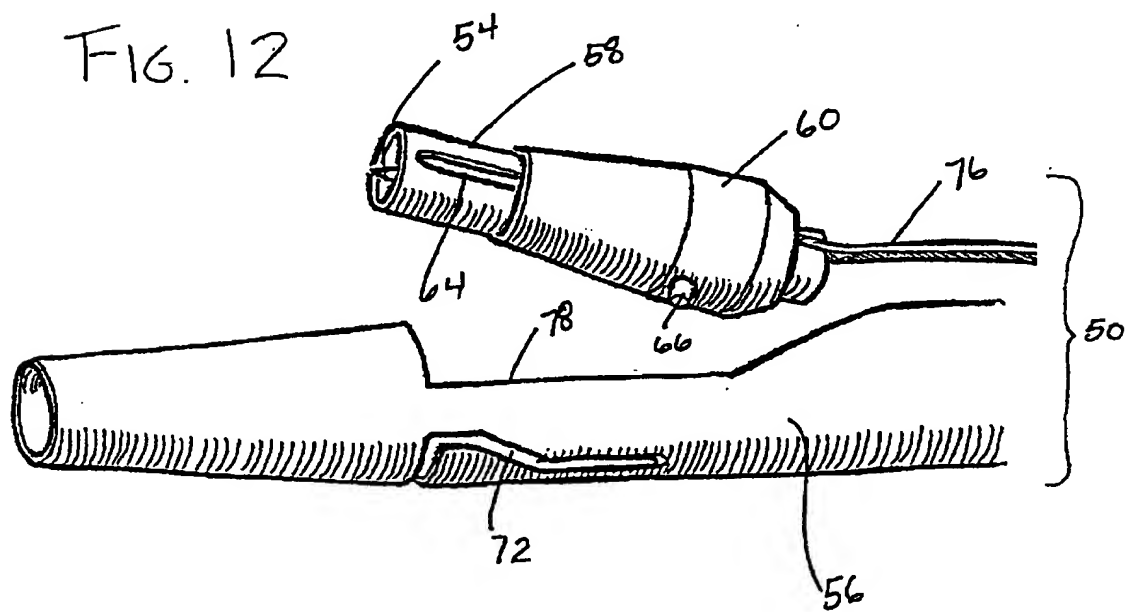

5/11

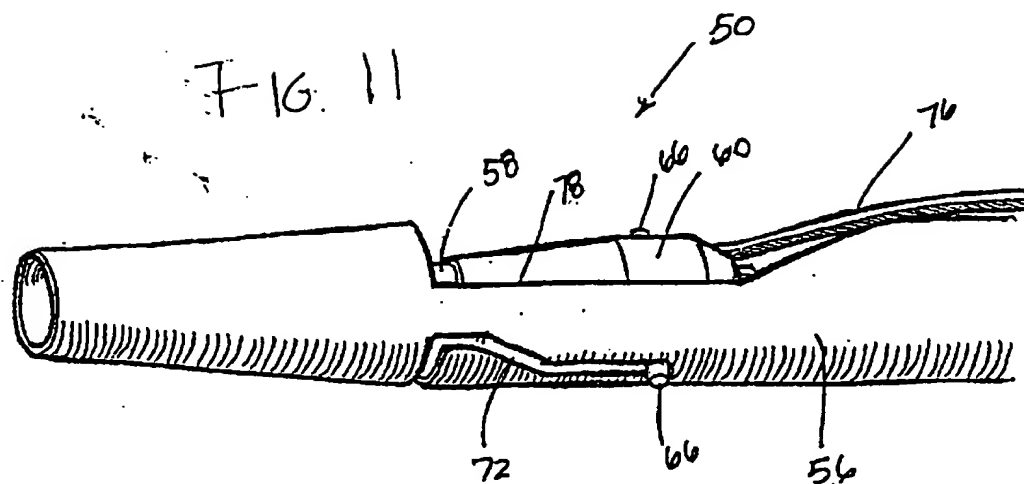

7/11

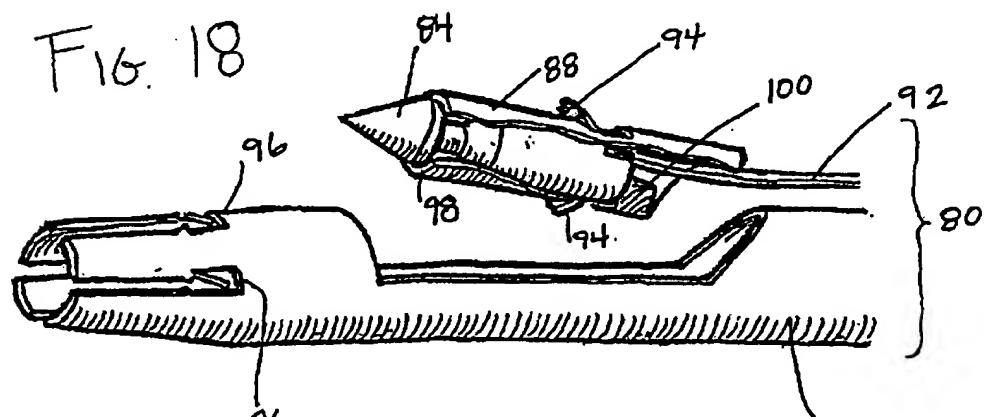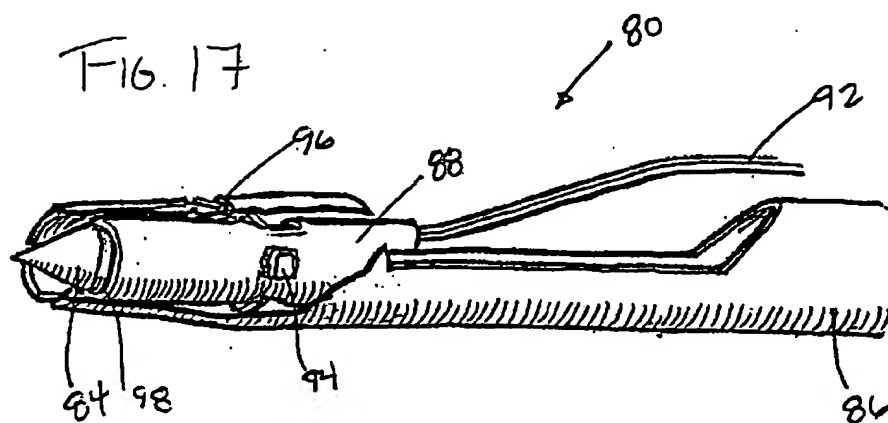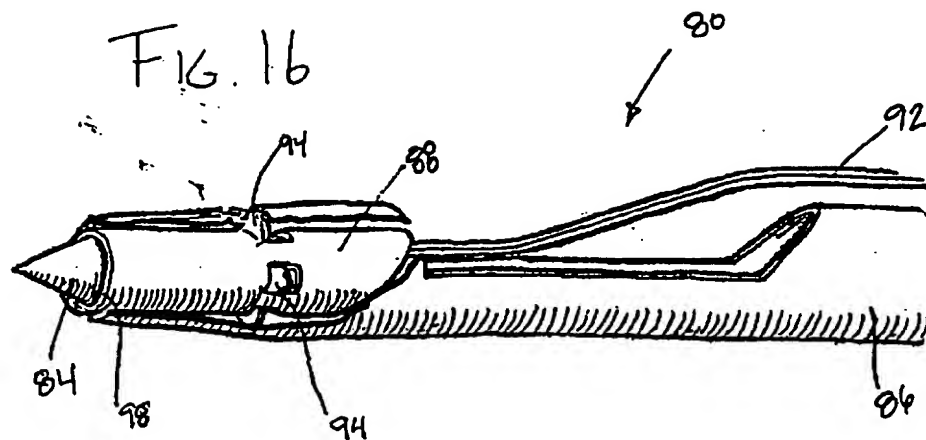

8/11

FIG. 19

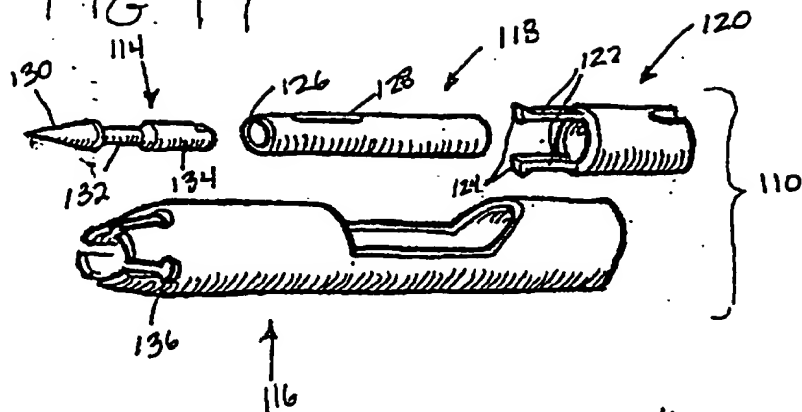


FIG. 20

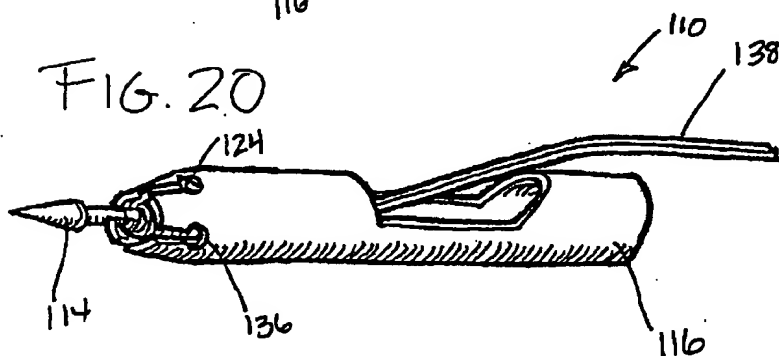


FIG. 21

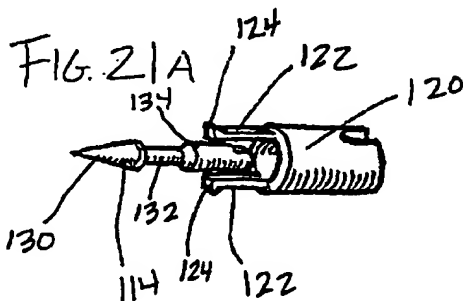
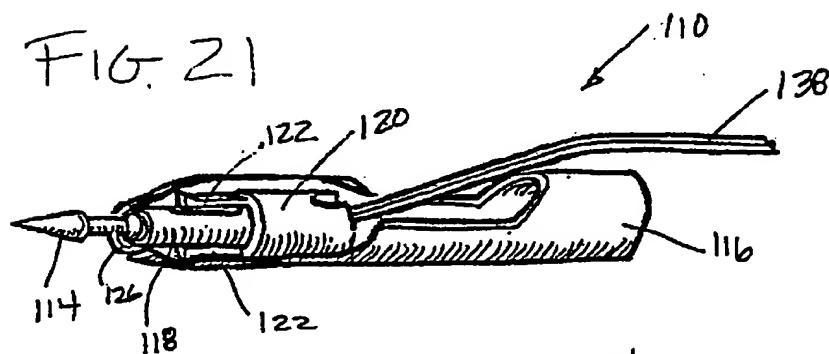


FIG. 13

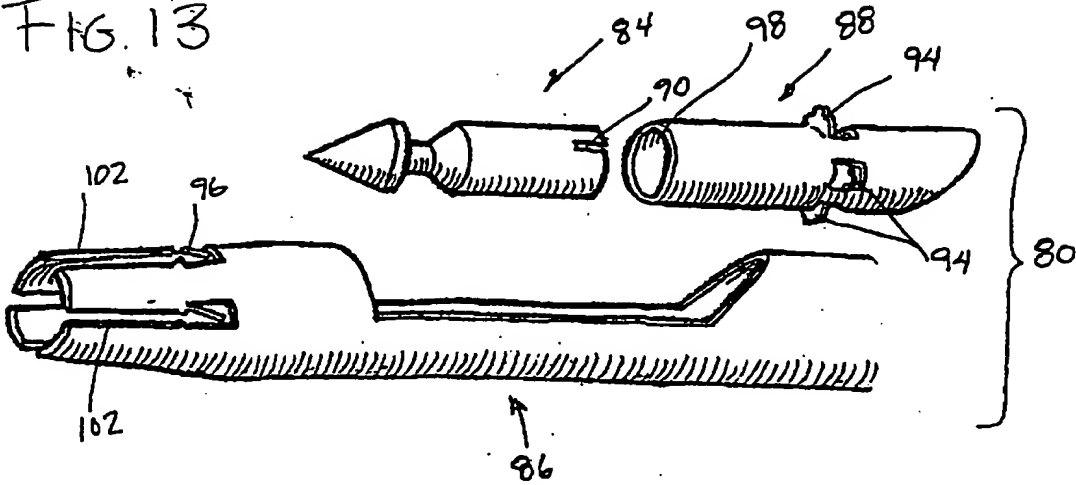


FIG. 14


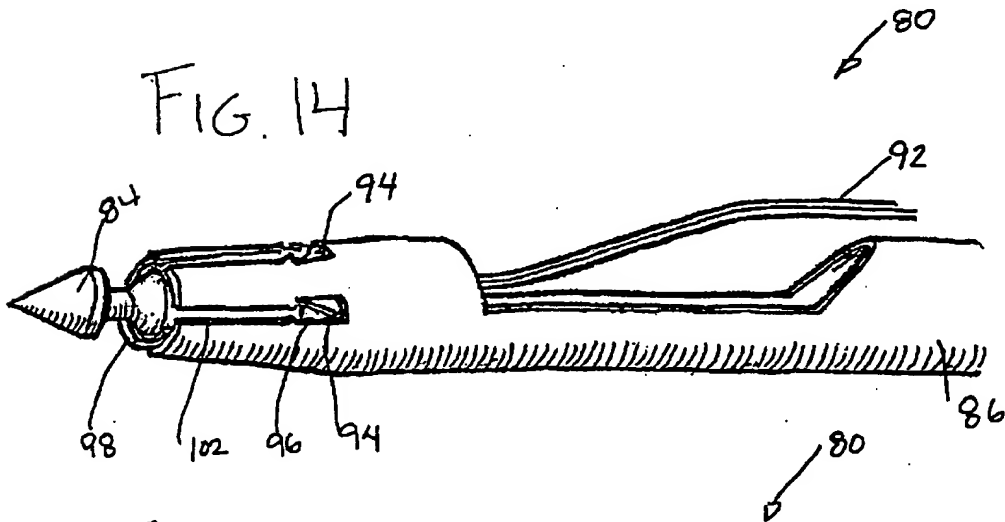


FIG. 15

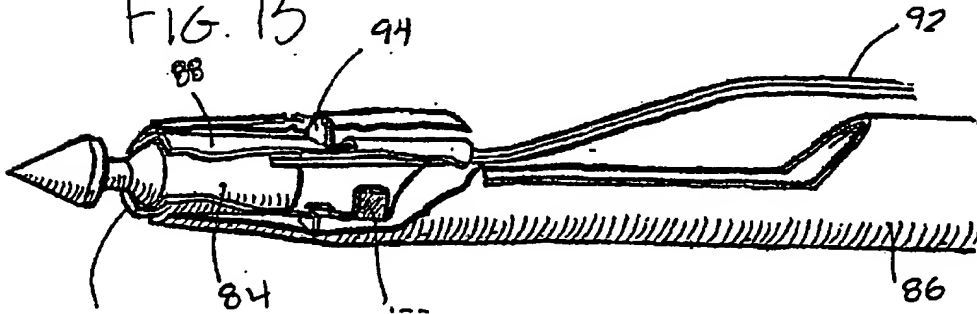

9/11

FIG. 22

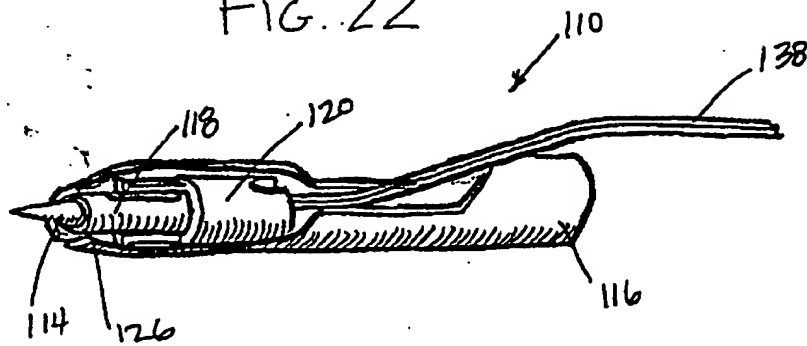


FIG. 23

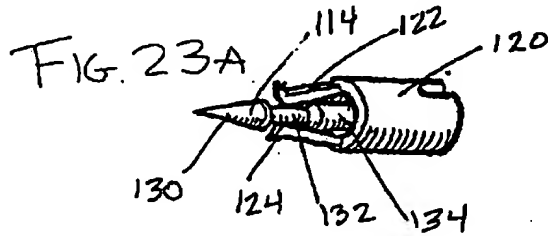
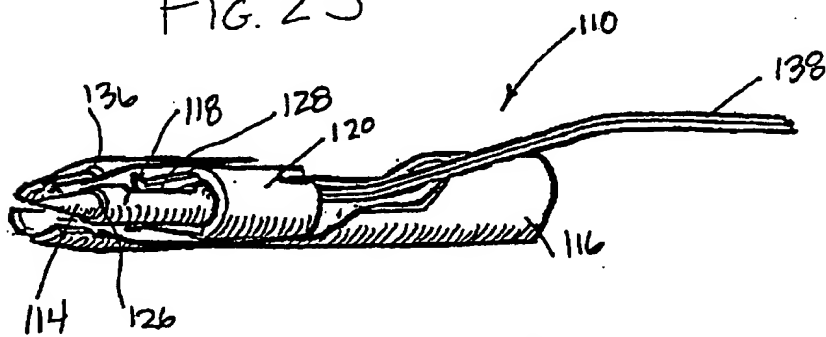


FIG. 24

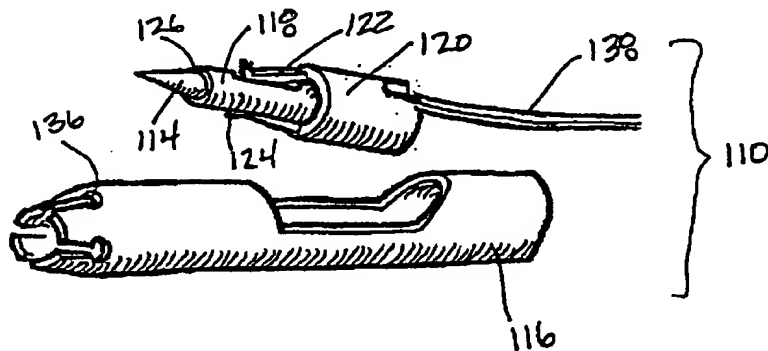


FIG. 25

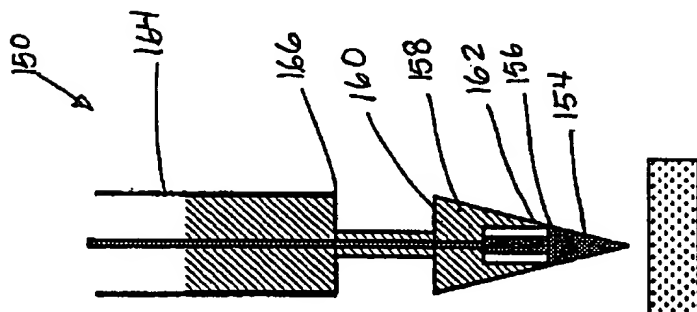


FIG. 26

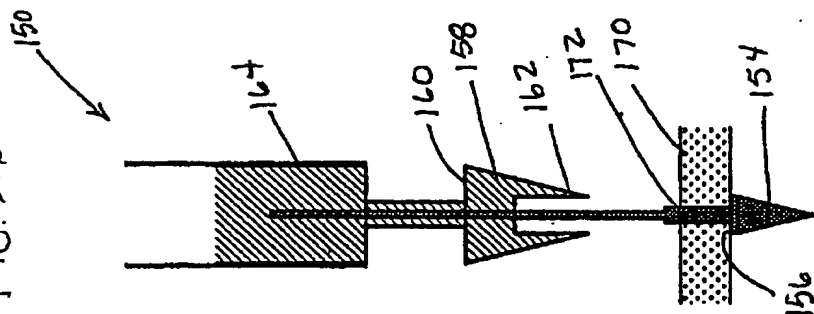


FIG. 27


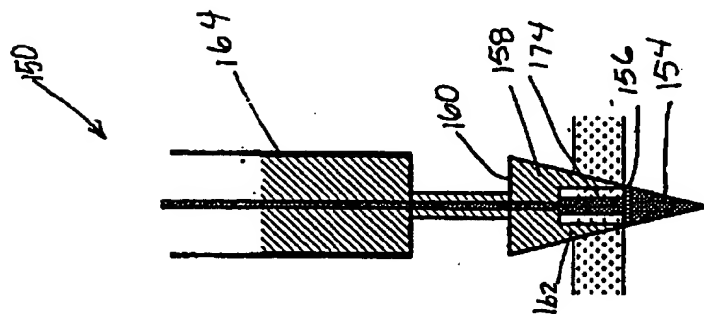


FIG. 28

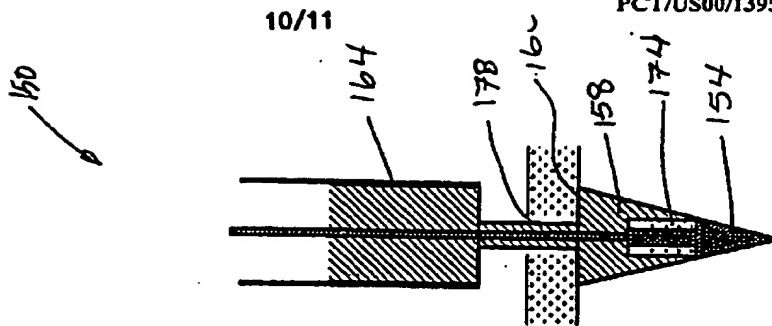

11/11

FIG. 29


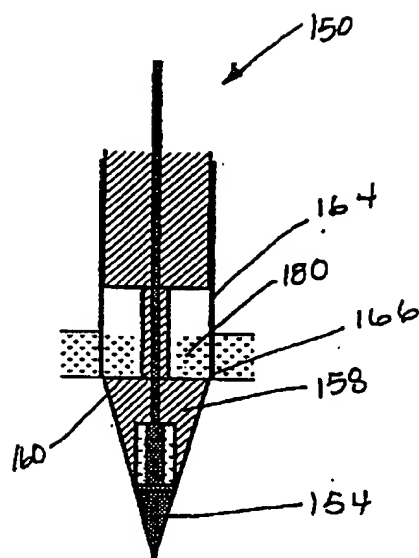


FIG. 30

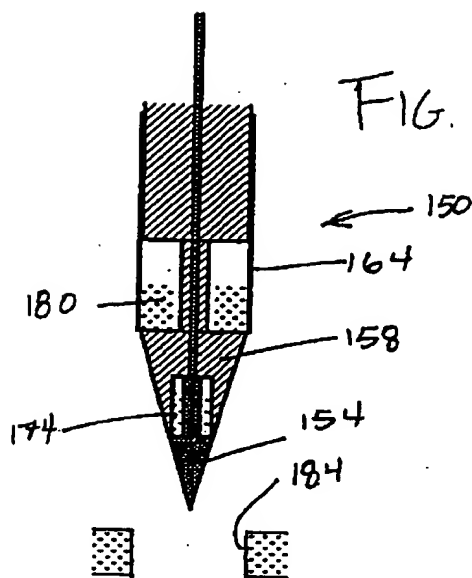

INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/US 00/13959

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B17/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 42262 A (ANDREAS ET AL.) 1 October 1998 (1998-10-01) abstract; figures 9A-23 page 16, line 29 -page 19, line 33	1,8,22
A	WO 92 08513 A (INTERVENTIONAL THERMODYNAMICS, INC.) 29 May 1992 (1992-05-29) page 17, line 21 -page 18, line 6; figures 8,9	1,8
A	EP 0 517 252 A (BLAKE) 9 December 1992 (1992-12-09) abstract; figures	1,8
A	US 5 893 369 A (LEMOLE) 13 April 1999 (1999-04-13) abstract; figures	1,8

-/-

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

17 August 2000

Date of mailing of the international search report

24/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 6818 Patentlaan 2
NL - 2200 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Giménez Burgos, R

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 00/13959

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	US 6 022 367 A (SHERTS) 8 February 2000 (2000-02-08) abstract; figures	1,8,22

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US 00 13959

FURTHER INFORMATION CONTINUED FROM PCT/SA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-17

Apparatus for piercing a vessel, punching a hole in the vessel, removing punched tissue from the vessel, and introducing an object into the vessel through the punched hole

2. Claims: 22,23

Double tissue punch comprising having a piercing element and two cutting elements.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 00/13959

Box III TEXT OF THE ABSTRACT (Continuation of item 5 of the first sheet)

The abstract is changed as follows:

line 1,4,7: after "tissue punch" insert "(50)",

line 2,4,5: after "piercing element" insert "(54)",

line 4,5,6: after "trocar" insert "(56)",

line 6: after "side wall" insert "(78)",

line 7: after "tissue trap" insert "(58)",

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter national Application No

PCT/US 00/13959

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9842262 A	01-10-1998	US 6036699 A AU 6870698 A EP 1011473 A	14-03-2000 20-10-1998 28-06-2000
WO 9208513 A	29-05-1992	AU 652979 B AU 9061591 A CA 2096651 A DE 69123982 D DE 69123982 T EP 0558642 A JP 6502791 T US 5312360 A US 5275611 A	15-09-1994 11-06-1992 21-05-1992 13-02-1997 04-12-1997 08-09-1993 31-03-1994 17-05-1994 04-01-1994
EP 0517252 A	09-12-1992	US 5192294 A AU 644570 B AU 1620892 A CA 2070465 A DE 69204355 D JP 7100143 A MX 9202687 A	09-03-1993 09-12-1993 10-12-1992 07-12-1992 05-10-1995 18-04-1995 01-12-1992
US 5893369 A	13-04-1999	NONE	
US 6022367 A	08-02-2000	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.